


# 1" DRY-SHUT SYSTEM

## AUTO SHUT-OFF POLYPROPYLENE COUPLING REDUCE SPILLAGE AND WASTE

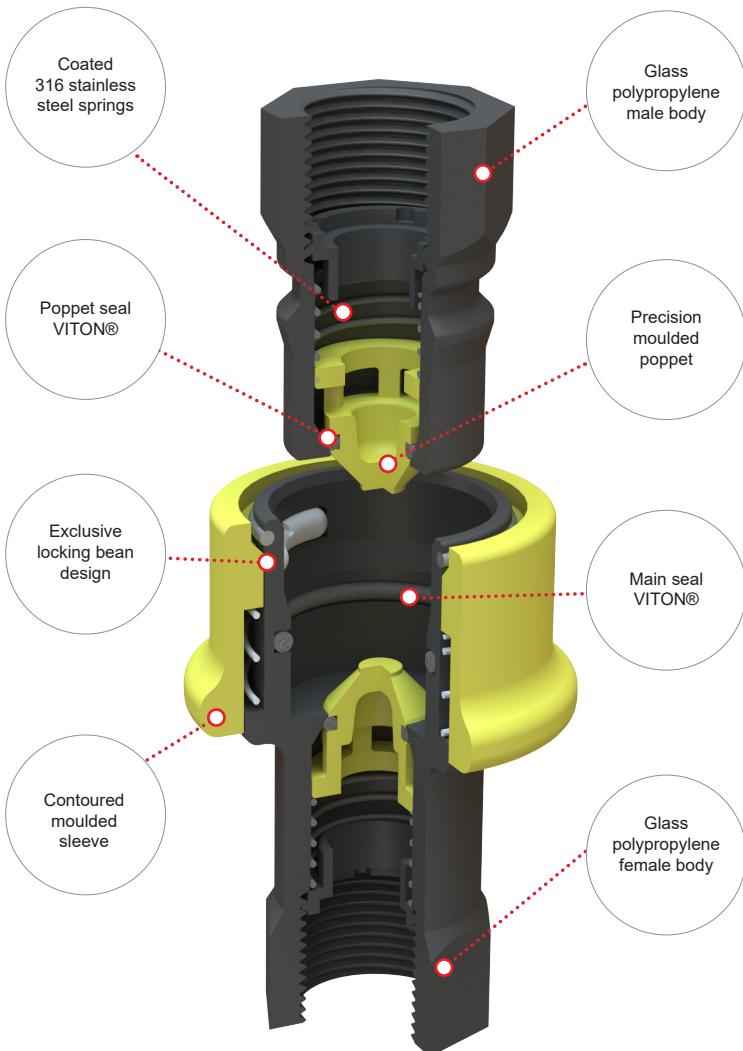

### INTRODUCING DRY-SHUT FROM CPP

The Dry-Shut from CPP is a precision moulded minimum spill coupling for low pressure liquid transfer.

On disconnection the poppets automatic close and shut off the liquid flow, resulting in minimal residual loss or air inclusion. This simple ISO "B" type operation makes it easy to handle with no levers or switches to operate. Our Dry-Shut couplings are ISO 7241-1 series B (ISO-B) interchangeable.

### TECH SPEC

Max working pressure: 100 psi (7bar)

Flow rate: 168 L/min (45 USG/pm)

Compatible: ISO 7241-1 (ISO-B)

IMPORTANT: As with other ISO-B type systems there is an approx 15ml of fluid that could discharge on opening and usual drip tray/bunding should be used.



	PART NUMBER	PRODUCT DESCRIPTION
1	DS10BMVF10BV027	1" Dry-Shut male valved adapter X 1" BSP female GPP. C/W Viton seals
2	DS10BFVF10BV027	1" Dry-Shut female valved coupler X 1" BSP female G/P/P. C/W Viton seals
	DS10MFSKITEPD	1" Dry-shut o-ring seal kit, EPDM
	DS10MFSKITVIT	1" Dry-shut o-ring seal kit, VITON
	DS10MFPOPTOOL	1" Dry-Shut poppet removal tool, black plastic

# 1" DRY-SHUT SYSTEM

STANDARD PARTS TO ADAPT IBC'S & HOSE CONNECTIONS



## TECH SPEC

At CPP® we have developed a range of easy fit convertors, adaptors and fittings to complement our DRY-SHUT coupling system. They are precision moulded in our factory in the UK, all come with seals for a leak free connection.

Max working pressure:100 psi (7bar)

Body Material: Polypropylene

O-rings & Gaskets: Olefin elastomer

## IBC CONVERTORS

	PART NUMBER	PRODUCT DESCRIPTION
1	HMFB10BP60UD027	1" BSP short male / o-ring X S60X6 female buttress C/W seal, G/P/P
2	HMFB10BP20M027	1" BSP short male / o-ring X 2" NPS female C/W seal, G/P/P
3	CFB2010PB027	2" Camlock Coupler x 1" BSP short male / o-ring, G/P/P
4	HMFB10BP100U0272	1" BSP short male / o-ring x S100X8 female Buttress C/W seal G/P/P
5	HMFPB1078RD027	1" BSP male Short/o-ring x RD78 (DIN 11851) Female G/P/P



## FITTINGS

	PART NUMBER	PRODUCT DESCRIPTION
1	CMF1010PB027	1" Part 'FS' 1" Camlock x 1" BSP Short Male C/W O-Ring G/P/P
2	DBMMPB20B10PB027	1" BSP short male /o-ring x BCS G2 x 11.5 (2" BSP/NPS) C/W o-ring
3	HMPB10T027	1" BSP short male / o-ring X 1" (25mm) hose tails G/P/P
4	HMPB10B075T027	1" BSP short male / o-ring X 3/4" (19mm) hose tails G/P/P
5	HMPB10B05T027	1" BSP short male / o-ring X 1/2" (13mm) hose tails G/P/P
6	HMPB10B038T027	1" BSP short male / o-ring X 5/8" (10mm) hose tails G/P/P
7	HMMPB1010B027	1" BSP short male / o-ring X 1" BSPT Male G/P/P
8	HMMPB10075B027	1" BSP short male / o-ring X 3/4" BSPT Male G/P/P
9	HMMPB1005B027	1" BSP short male / o-ring X 1/2" BSPT Male G/P/P

NEW

UK: +44-1474 643104

US: +1-863-638-6335



[www.cpp-lm.com](http://www.cpp-lm.com)

CPP-LM LTD • K8, NORTHFLEET IND. EST. KENT DA11 9BL.UK

**CPP**®